




Issuance date: 01.04.2022  
Validity date: 01.04.2027

## Dramix® Steel fibers for Concrete Reinforcement

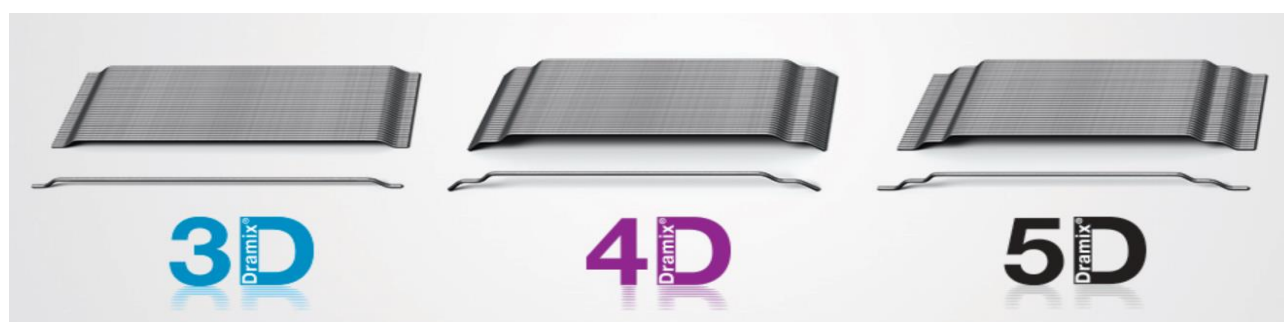

### EPD Program Operator:

Instytut Techniki Budowlanej (ITB)  
Address: Filtrowa 1, 00-611 Warsaw, Poland  
Website: [www.itb.pl](http://www.itb.pl)  
Contact: Michał Piasecki  
[m.piasecki@itb.pl](mailto:m.piasecki@itb.pl), [energia@itb.pl](mailto:energia@itb.pl)

### Owner of the EPD:

N.V. Bekaert S.A.  
Bekaertstraat 2  
8550 Zwevegem, Belgium  
Contact: +32-56766111  
[Aditya.Mangrulkar@bekaert.com](mailto:Aditya.Mangrulkar@bekaert.com)  
[Hendrik.Thooft@bekaert.com](mailto:Hendrik.Thooft@bekaert.com)  
Website: [www.bekaert.com](http://www.bekaert.com)

ITB is the verified member of The European Platform for EPD program operators and LCA practitioner [www.eco-platform.org](http://www.eco-platform.org)

### Basic information

This declaration is the Type III Environmental Product Declaration (EPD) based on EN 15804 and verified according to ISO 14025 by an external auditor. It contains the information on the impacts of the declared construction materials on the environment. Their aspects were verified by the independent body according to ISO 14025. Basically, a comparison or evaluation of EPD data is possible only if all the compared data were created according to EN 15804 (see point 5.3 of the standard).

**Life cycle analysis (LCA):** A1-A4, C1-C4 and D modules in accordance with EN 15804  
(Cradle to Gate with options)

**The year of preparing the EPD:** 2022

**Service Life:** not declared by producer, specific calculation in accordance with EN 1990

**PCR:** ITB-PCR A (PCR based on EN 15804+A1)

**Declared unit:** 1 kg of steel fibers

**Product Standards:** EN 14889-1 and ISO 13270—class A & conforms to ASTM A-820

**Reasons for performing LCA:** B2B

**Representativeness:** manufactured in Indonesia, year 2019

## PRODUCTS DESCRIPTION

Bekaert ([www.bekaert.com](http://www.bekaert.com)) is a global technological and market provider of advanced solutions based on metal transformation and coatings, and manufacturer of drawn steel wire products.

Dramix® fibers for concrete reinforcement (3D, 4D and 5D) covered by this EPD are manufactured in the manufacturing plant, located at Karawang, West Java, Indonesia. Dramix® is the company brand name of steel fibers for concrete reinforcement. Bekaert produces fibers in different variants according to the intended application. There are different product variants like glued or loose fibers. Gluing is applied for some of the variants to avoid fiber balling during mixing & to ensure homogeneous distribution of the fibers throughout the concrete mix. Figure 1 shows a basic 3D fiber type.

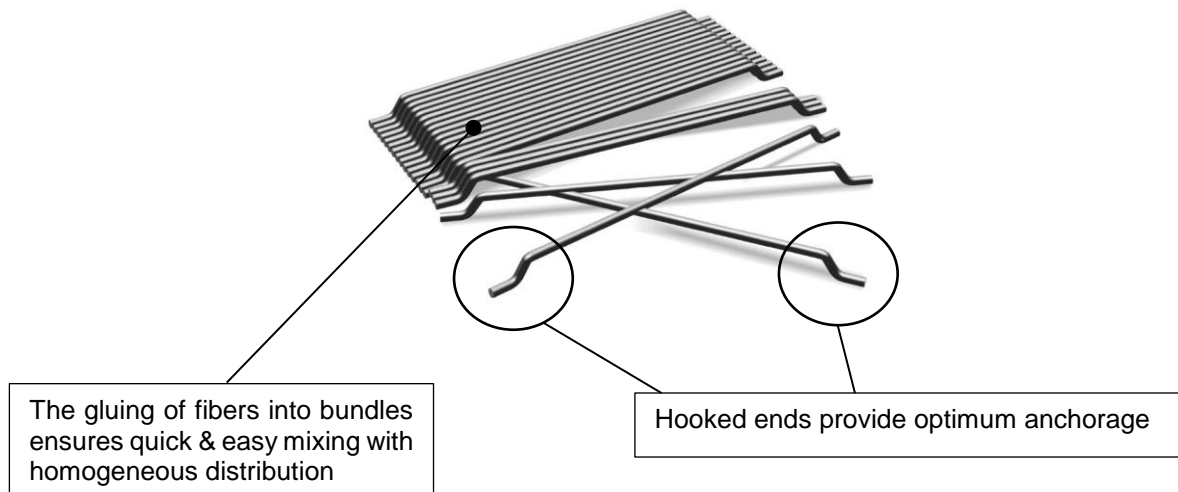


Figure 1. Technical concept of the Dramix® 3D fiber.

Specific product technical documents are available at [Dramix® steel fiber concrete reinforcement solutions - Bekaert.com](http://Dramix®.steel.fiber.concrete.reinforcement.solutions.-Bekaert.com)

Bekaert Karawang produces Bright (uncoated or brass/bronze coated) fibers with a nominal diameter ranging from 0,55 mm up to 0,90 mm & with an indicative length ranging from 30 mm up to 60 mm with nominal tensile strength as mentioned in Tables 1, 2 & 3. Mainly according to the profile, steel fibers are grouped into 3D, 4D and 5D types. Bekaert offers different types of packaging; the two main types are paper bags on pallets and big bags on pallets.

Table 1: Specification of 5D & 4D fiber types.

Fiber type	Nominal Tensile Strength N/mm <sup>2</sup>	Nominal Length mm	Nominal Diameter mm
5D 65/60BG	2300	62	0.90
4D 65/35BG	1850	36	0.55
4D 65/60BG	1600	61	0.90
4D 80/60BG	1800	61	0.75
4D 80/60BGP	2200	61	0.75

Table 2: Specification of 3D fiber types.

Fiber type	Nominal Tensile Strength N/mm <sup>2</sup>	Nominal Length mm	Nominal Diameter mm
3D 45/35BL	1225	35	0.75
3D 55/30BG	1345	30	0.55
3D 55/35BG	1270	35	0.62
3D 65/35BG	1345	35	0.55
3D 65/50BG	1225	50	0.75
3D 65/60BG	1160	60	0.90
3D 80/60BG	1225	60	0.75
3D 80/60BGP	1800	60	0.75

Table 3: Specification of BSF & other fiber types.

Fiber type	Nominal Tensile Strength N/mm <sup>2</sup>	Nominal Length mm	Nominal Diameter mm
BSF 65/35BG	1300	35	0.55
BSF 80/60BG	1200	60	0.75
Dramix® Ready	1225	60	0.75

## PRODUCT APPLICATION

Dramix® steel fibers are used for concrete reinforcement and are an alternative to steel mesh and bars. They are discontinuous, three-dimensional and isotropic reinforcement. The steel fibers bridge cracks at their small widths, distribute stresses and increase the strength of concrete in a cracked state. Adding the adequate number of fibers to the concrete plasticizes it, increasing its tensile and shear strength, impact strength and fatigue resistance. Steel fibers for structural use are used for concrete & mortar reinforcement for the following applications: over ground applications (flooring, building, civil engineering, etc.), underground applications (segmental linings for tunneling etc.) & precast.



Floors

Concrete durability



Foundations

Reliable and cost-effective solution



Pavements

100% resilient and impact-proof



Precast elements

Strong and watertight



Structural applications

Better, faster designs



Underground structures

Optimal strength and safety

The hooked ends of Dramix® 3D ensure the desired fiber pullout. This is the mechanism, which actually generates the renowned concrete ductility and post-crack strength. The improved anchorage of Dramix® 4D utilizes the same principle but translates it to greater steel strengths (Figure 2). Dramix® 5D, in contrast, is shaped to form the perfect anchor; the pullout mechanism is replaced by fiber elongation. The tensile strength of a steel fiber has to increase in parallel with the strength of its anchorage. Dramix® 3D, 4D, and 5D are each

designed to capitalize on the wire strength to the maximum degree. Dramix® 3D and 4D create concrete ductility as a result of the slow deformation of the hook during the pullout process, and not due to the ductility of the wire itself. This is different for Dramix® 5D. Due to its anchor design, the fiber cannot be pulled out and does not move in concrete. Instead, the wire is elongated, providing the ductility on the same principle as classic reinforcement steel. The tensile strength level of the Dramix® product series is shown in Figure 2.

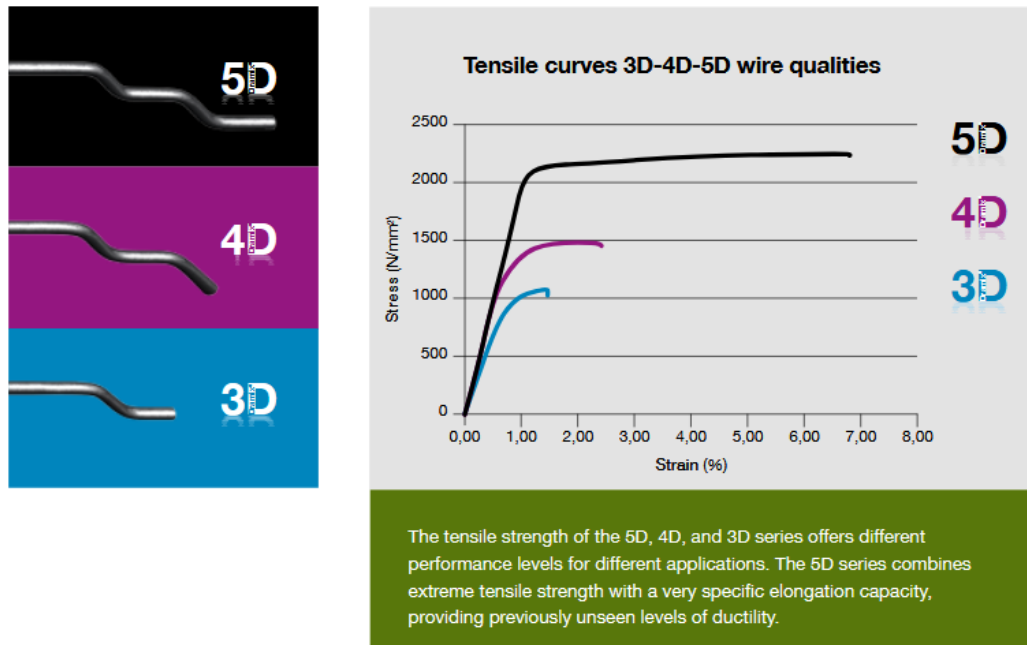


Figure 2. The tensile strength of the Dramix® product series.

## LIFE CYCLE ASSESSMENT (LCA) – general rules applied

### Unit

The declared unit is 1 kg of Dramix® steel fiber.

### System boundary

The life cycle analysis of the declared product covers “Product Stage” A1-A3 modules, transport to a construction site – A4 module, “End of Life stage” C1, C2, C3, C4 modules and gains and loads beyond system in D module (Cradle to Gate with options) in accordance with EN 15804 and ITB PCR A.

### Allocation

The allocation rules used for this EPD are based on general ITB PCR A. Production of steel fibers is a line process in a manufacturing plant located at Karawang (see Figure 3). Allocation of impacts is done on product mass basis (17% of total mass production in Karawang). All impacts from raw materials production (wire rod, bead wires, widia dies, PCD dies, soaps, emulsion, glue, bags, paper and pallets) are allocated in the A1 module of the LCA. 99% of the impacts from a specific Dramix® line production were allocated to products covered by this declaration. Module A2 includes transport of raw materials such as steel (mainly sea freight from Malaysia partly combined with trucks) from supplier to manufacturing plant. Municipal wastes of the factory were allocated to module A3. Energy supply (Inti Lingga Sukses) and electricity (PLN) was inventoried and 100% was allocated to the product assessed. Emissions in the factory are assessed using emission factors (Ecoinvent) for energy carriers (Indonesian Energy Mix for Electricity production was used).

### **System limits**

99% of materials and 100% of the energy consumption (electricity, diesel, compressed air) were inventoried in the factory and were included in the calculation. In the assessment, all significant parameters from gathered production data are considered, i.e. all material used per formulation (main input is steel wire rod), utilized thermal energy and electric power consumption, direct production waste, and available emission measurements. Tire consumption for transport was not taken into account. Precomponents like labels & tapes with a percentage share of less than 0.2% were not included in the calculations. It is assumed that the total sum of omitted processes does not exceed 1% of all impact categories. In accordance with EN 15804 machines and facilities (capital goods) required for and during production are excluded, as is transportation of employees.

### **A1 and A2 Modules: Raw materials supply and transport**

Steel produced in Malaysia (dominant steel used in the Karawang) in accordance with the declaration the Trade Forum of Malaysian Iron & Steel Industry MISIF (for the GHG / GWP calculation purposes) is assumed as EAF production in 99%. Using this assumption (EAF for Malaysia) for the carbon footprint, ITB adopted averaged data for “steel production, electric, low-alloyed, rest of the world” Ecoinvent v 3.8. Data on transport of the different input products to the manufacturing plants was inventoried in details and modelled by the assessor. For calculation purposes, European fuel averages are applied in module A2. A significant amount of resource materials for production comes to West Java by sea freight from different parts of the world.

### **A3: Production**

The production process (Karawang) is presented in Figure 3.

### **A4: Transport to construction site**

The following transport scenario to the place of use was assumed based on the manufacturer's declaration: large vehicle, 75% capacity over an average distance of 500 km. For calculation purposes, Euro-3 fuel averages are applied in module A4.

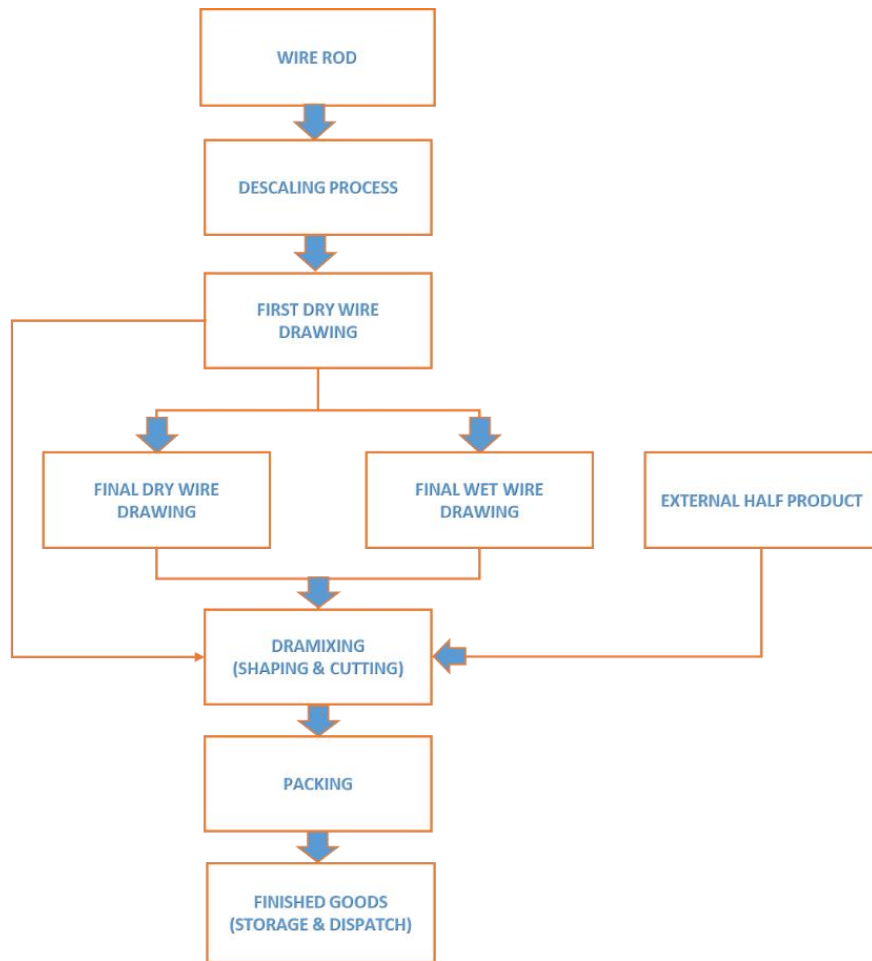


Figure 3. A schematic diagram of the industrial process in Karawang (A3 module).

#### End of life scenarios (C and D modules)

The end of life scenario has been generalized. The steel fiber reinforced concrete is dismantled (C1 module) with cranes, power tools, hammers, breakers, and grappling hooks mounted onto heavy equipment. 100% material recovery during demolishing is assumed. The manufacturer declares the technology and the scenario in which the steel fibers can be separated (in the near future) from waste concrete: up to 95% with heavy crushers and a magnetic separator and 5% goes to a landfill. 10% of the recovered steel waste product can be reused to new applications (concrete reinforcement). 90% of the recovered steel can be used for new steel production (EAF process). It is assumed that at the end of life the transport distance from the product deconstruction place to waste processing (C2) is 50 km on > 16 t loaded lorry with 75% capacity utilization and fuel consumption of 35 l per 100 km. Materials recovered from dismantled products are recycled according to the BAT treatment practice. 5% is sent to a landfill (C4). The reuse, recovery and recycling potential for a new product system is considered beyond the system boundaries (module D) based on the World Steel recommendations and national practices (see references).

Table 4. End of life scenarios for Dramix® products.

Progress products	Material recovery from concrete		Landfilling
Steel products	95%	→ 10% Reuse → 90% Recycling	5%

## Environmental Product Declaration Type III ITB No. 311/2022

### Data collection period

The data for manufacture of the declared products refers to the period between 01.01.2019 – 31.12.2019 (1 year). The life cycle assessments were done for Indonesia as the reference area.

### Data quality - production

The values determined to calculate A3 originate from verified Progress LCI inventory data for Karawang Factory. A1 values were prepared considering generic steel based on Ecoinvent data. Allocation for steel production impacts is done in accordance with *LCI data for Steel products Report* compiled by Brayan Hughes and William Hare (2012 for World Steel Association).

### Assumptions and estimates

The impacts of the representative products were aggregated using weighted averages. Data regarding production per 1 kg of product was averaged for the analysed production of each product group. All production processes (A3) were assigned to different types of products in an equal way.

### Calculation rules

LCA was done in accordance with the ITB PCR A document. Characterization factors are CML ver. 4.2 based (2016). ITB-LCA algorithms were used for impact calculations. A1 was calculated based on data from the databases and generic EPD for steel, A2 and A3 were calculated based on the LCI questionnaire provided by the manufacturer.

### Databases

The background data for the processes come from the following databases: Ecoinvent v3.8 (steel, ancillary items, packaging), specific data (PLN electricity, Indonesian statistics, Malaysian Iron & Steel Industry MISIF, Indonesian electricity mix and combustion factors for fuels). Specific (LCI) data quality analysis was a part of the audit. The time related quality of the data used is valid (5 years).

## LIFE CYCLE ASSESSMENT (LCA) – Results

### Declared unit

The declaration refers to the unit DU– 1 kg of the Dramix® & Steel fibers (Table 1, 2 & 3). The following life cycle modules are included in the declaration (Table 5).

Table 5. System boundaries (life stage modules included) in a product environmental assessment.

Environmental assessment information (MA – Module assessed, MNA – Module not assessed, INA – Indicator Not Assessed)																
Product stage			Construction process		Use stage							End of life				Benefits and loads beyond the system boundary
Raw material supply	Transport	Manufacturing	Transport to construction site	Construction - installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse - recovery - recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
MA	MA	MA	MA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MA	MA	MA	MA	MA

# Environmental Product Declaration Type III ITB No. 311/2022

Table 6. Environmental product characteristic – 1 kg of Dramix® steel fibers (Karawang).

Environmental impacts: (DU) 1 kg										
Indicator	Unit	A1	A2	A3	A4	C1	C2	C3	C4	D
Global warming potential	kg CO <sub>2</sub>	1.32E+00	4.13E-02	1.28E-01	5.25E-02	2.52E-03	3.20E-03	1.68E-03	3.00E-03	-2.36E-01
Depletion potential of the stratospheric ozone layer	kg CFC 11	7.61E-08	5.80E-09	1.95E-09	0.00E+00	2.89E-11	0.00E+00	1.92E-11	1.15E-10	-4.49E-09
Acidification potential of soil and water	kg SO <sub>2</sub>	6.37E-03	1.10E-03	4.98E-04	4.16E-04	2.31E-06	2.21E-05	1.53E-06	3.50E-06	-9.11E-04
Formation potential of tropospheric ozone	kg Ethene	4.79E-04	2.76E-05	1.52E-06	2.67E-05	1.19E-05	1.48E-06	7.94E-06	6.50E-07	-1.02E-04
Eutrophication potential	kg (PO <sub>4</sub> ) <sup>3-</sup>	1.32E-03	1.19E-04	6.93E-04	7.38E-05	9.61E-08	3.90E-06	6.39E-08	1.72E-06	-3.17E-04
Abiotic depletion potential (ADP-elements) for non-fossil resources	kg Sb	7.90E-04	2.50E-04	8.02E-04	0.00E+00	1.94E-05	0.00E+00	1.29E-05	6.00E-05	-2.18E-04
Abiotic depletion potential (ADP-fossil fuels) for fossil resources	MJ	1.58E+01	5.66E-01	1.31E+00	7.17E-01	3.00E-02	3.92E-02	2.00E-02	1.30E-02	-2.19E+00
Environmental aspects: (DU) 1 kg										
Indicator	Unit	A1	A2	A3	A4	C1	C2	C3	C4	D
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	MJ	INA	INA	INA	INA	INA	INA	INA	INA	INA
Use of renewable primary energy resources used as raw materials	MJ	INA	INA	INA	INA	INA	INA	INA	INA	INA
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ	1.25E+00	2.75E-03	5.20E-02	7.17E-03	4.50E-03	3.92E-04	2.99E-03	0.00E+00	-3.56E-01
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	MJ	INA	INA	INA	INA	INA	INA	INA	INA	INA
Use of non-renewable primary energy resources used as raw materials	MJ	INA	INA	INA	INA	INA	INA	INA	INA	INA
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ	1.79E+01	5.94E-01	1.44E+00	7.50E-01	3.30E-02	4.12E-02	2.19E-02	1.35E-02	-2.52E+00
Use of secondary material	kg	8.37E-01	0.00E+00	1.95E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-1.19E-02
Use of renewable secondary fuels	MJ	5.59E-03	5.59E-03	3.12E-01	3.77E-02	0.00E+00	2.06E-03	0.00E+00	0.00E+00	-4.66E-04
Use of non-renewable secondary fuels	MJ	4.26E-05	4.26E-05	1.51E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-0.00E+00
Net use of fresh water	m <sup>3</sup>	2.30E-02	5.42E-05	5.49E-04	1.29E-06	9.48E-06	4.20E-07	6.30E-06	1.00E-05	-1.01E-04
Other environmental information describing waste categories: (DU) 1 kg										
Indicator	Unit	A1	A2	A3	A4	C1	C2	C3	C4	D
Hazardous waste disposed	kg	7.83E-04	5.47E-07	3.47E-07	4.64E-06	4.00E-08	1.51E-06	2.66E-08	1.90E-08	-1.01E-04
Non-hazardous waste disposed	kg	5.75E-01	1.68E-03	2.17E-03	5.51E-03	3.61E-04	1.79E-03	5.02E-02	5.01E-03	-3.98E-02
Radioactive waste disposed	kg	4.82E-05	3.56E-06	5.58E-07	1.00E-07	4.00E-08	1.00E-07	2.66E-08	7.20E-08	-2.95E-05
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.50E-02	0.00E+00	-8.36E-04
Materials for recycling	kg	0.00E+00	0.00E+00	1.41E-04	0.00E+00	0.00E+00	0.00E+00	8.55E-01	0.00E+00	-7.72E-06
Materials for energy recover	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-1.15E-06
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00



## RESULTS INTERPRETATION

The environmental impacts of Dramix® products (cradle to gate with options) is largely dependent on the energy-intensive production of steel on which the manufacturer has a limited influence only. The carbon impact of steel production (Wire Rods) in the product stage A1 is as high as 94%. The impact of the production line A3 largely depends on the amount of electricity consumed by the manufacturing plant (0.39 kWh/kg of product). There are no significant emissions or environmental impacts in the A3 production processes alone.

LCA results show that the cradle-to-gate carbon (Global Warming Potential) impact of 1 kg of fiber production is 1.44 kg CO<sub>2</sub>eq. In comparison, a kg of steel produced worldwide in 2019 emitted on average 1.85 kg of carbon dioxide.

The LCA results show that the cradle-to gate primary energy fossil fuel depletion is equal to 17.1 MJ/kg of Dramix®. This is due to the production of electricity by the Indonesia and Malaysia. The transport of raw materials from distances is optimized (0.04 kg CO<sub>2</sub>/kg).

Due to the high potential for recycling and reuse (95%), the products have noticeable module D benefits.

Note: Due to the fact that different types of Dramix® differ in the amount of energy and processes involved in their production, the possibility of using GWP multipliers (conversion factor) for each specific product type was introduced.

*Table 7. Global warming potential per 5D,4D types.*

Fiber type	Global warming potential Kg CO <sub>2</sub>
5D 65/60BG	1.59
4D 65/35BG	1.45
4D 65/60BG	1.43
4D 80/60BG	1.44

*Table 8. Global warming potential per 3D & other types.*

Fiber type	Global warming potential Kg CO <sub>2</sub>
3D 80/60BGP	1.43
3D 65/35BG	1.40
3D 65/50BG	1.39
3D 80/60BG	1.40
BSF 65/35BG	1.40
BSF 80/60BG	1.40

## Environmental Product Declaration Type III ITB No. 311/2022

### VERIFICATION

The process of verification of this EPD was in accordance with ISO 14025 and ISO 21930. After verification, this EPD is valid for a 5-year-period. EPD does not have to be recalculated after 5 years if the underlying data have not changed significantly.

The basis for LCA analysis was EN 15804 and ITB PCR A	
Independent verification corresponding to ISO 14025 (sub clause 8.1.3.)	
<input checked="" type="checkbox"/> external	<input type="checkbox"/> internal
External verification of EPD: Ph.D. Eng. Halina Prejzner LCA, LCI audit and input data verification: Ph.D. D. SC.Eng. Michał Piasecki. m.piasecki@itb.pl Verification of LCA: Ph.D. Eng. Justyna Tomaszewska. j.tomaszewska@itb.pl	

### Normative references

- ITB PCR A General Product Category Rules for Construction Products
- EN 14889-1:2006 Fibers for concrete. Steel fibers. Definitions, specifications and conformity
- LCI DATA FOR STEEL PRODUCTS at [https://www.worldsteel.org/en/dam/jcr:04f8a180-1406-4f5c-93ca-70f1ba7de5d4/LCI%2520study\\_2018%2520data%2520release.pdf](https://www.worldsteel.org/en/dam/jcr:04f8a180-1406-4f5c-93ca-70f1ba7de5d4/LCI%2520study_2018%2520data%2520release.pdf)
- ISO 14025:2006. Environmental labels and declarations – Type III environmental declarations – Principles and procedures
- ISO 21930:2017 Sustainability in buildings and civil engineering works – Core rules for environmental product declarations of construction products and services
- ISO 14044:2006 Environmental management – Life cycle assessment – Requirements and guidelines
- EN 15804 Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products
- PN-EN 1992-1-1:2008 „Eurokod 2 - Projektowanie konstrukcji z betonu - Część 1-1: Reguły ogólne i reguły dla budynków”



Instytut Techniki Budowlanej

00-611 Warsaw, Filtrów 1

Thermal Physics, Acoustics and Environment Department

02-656 Warsaw, Kałwów 21

## CERTIFICATE No 311/2022 of TYPE III ENVIRONMENTAL DECLARATION

Product:

**Dramix® Steel fibers for Concrete Reinforcement (Karawang)**

Manufacturer:

**N.V. Bekaert S.A.**

Bekaertstraat 2, 8550 Zwevegem, Belgium

Produced in the manufacturing plant:

**PT. Bekaert Wire Indonesia**

Jalan Surya Utama Kavling I-14, Kota Industri Suryadipa - Telukjambe, Karawang,

West Java 41363, Indonesia

confirms the correctness of the data included in the development of  
Type III Environmental Declaration and accordance with the requirements of the standard

**PN EN 15804**

**Sustainability of construction works.**

**Environmental product declarations.**

**Core rules for the product category of construction products.**

This certificate, issued for the first time on 1<sup>st</sup> April 2022 is valid for 5 years  
or until amendment of mentioned Environmental Declaration

Head of the Thermal Physic, Acoustics  
and Environment Department

*Agnieszka Winkler-Skalna*  
Agnieszka Winkler-Skalna, PhD



Deputy Director  
for Research and Innovation

*Krzysztof Kućzyński*  
Krzysztof Kućzyński, PhD

Warsaw, April 2022